

# Range *clear water*

Water pressure booster - Regulation - Anti water hammer

## Hydrofort

Bottom 90° elbow outlet - 100 to 2000 L

The **Hydrofort** vessel ensures that the pressure in a system is maintained following low consumption or leaks (also limits the number of pump start per hour).

MANUFACTURING TO CODAP



### PAINT

**Internal.** Anti rust glycerophthalic primer, colour red ocre, thickness 30 microns.  
**External.** One coat acrylic urethane resin, colour orange, thickness 30 microns.



### BLADDER

Interchangeable food quality butyl.





### WARRANTY

Not including parts subject to wear and subject to use under normal conditions.



### PACKING

Bubble pack for the vessels, cardboard box for the various equipment and/or accessories.

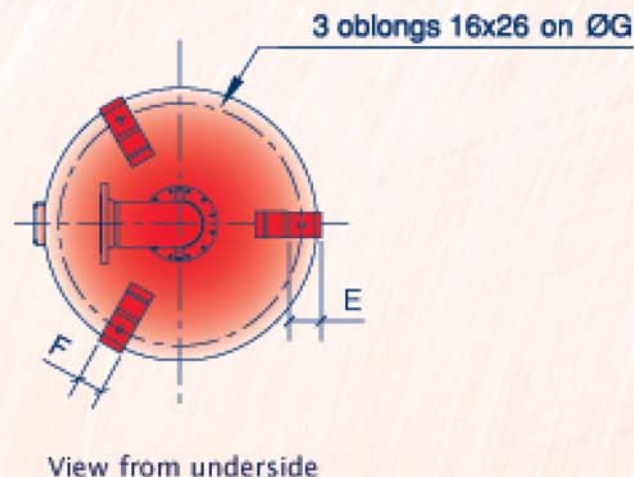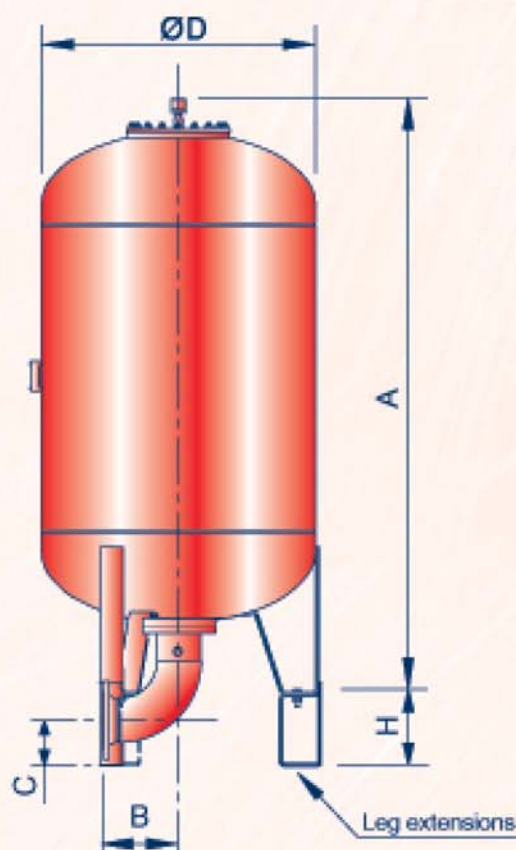

DN Outlet	Référence	B	C	Outlet weight (KG)	H
50	R7900M00001	124	241	13	230
80	R7901M00001	172	213	15	230
100	R7910M00001	217	182	16	230
125	R7911M00001	259	147	20	230
150	R7912M00001	304	176	25	300

The dimension shown are indicative and can be modified without warning.

## Range 25/37.5 bar

Code	Vol.	A (mm)	Ø D (mm)	E	F	G	Weight without outlet (kg)
HF-100-25/37.5-VF	100	807	630	54	50	560	116
HF-200-25/37.5-VF	200	1132	630	54	50	560	159
HF-300-25/37.5-VF	300	1457	630	54	50	560	202
HF-500-25/37.5-VF	500	2107	630	54	50	560	288
HF-750-25/37.5-VF	750	1912	850	80	80	755	439
HF-1000-25/37.5-VF	1000	2412	850	80	80	755	549
HF-1500-25/37.5-VF	1500	2495	1000	80	100	905	792
HF-2000-25/37.5-VF	2000	3195	1000	80	100	905	1007